

Pipe uPVC, Gutter & Fittings Manufacturer



# PiPAMAS

SARANA KEHIDUPAN BERKUALITAS



## SARANA PENYALURAN AIR BERSIH DAN AIR KOTOR



No. 76541/A/0001/NA/En



06-0084-2002

















K-6742

PIPAMAS AW 8"

## FITTING uPVC

### CLASS AW

<b>TS Elbow</b>  <b>Ukuran</b> 1/2 3/4 1 1 1/4	<b>NEW TS Tee</b>  <b>Ukuran</b> 1/2 3/4 1 1 1/4 1 1/2 2 2 1/2	<b>TS Socket</b>  <b>Ukuran</b> 1/2 3/4 1 1 1/4	<b>TS Reducer Socket</b>  <b>Ukuran</b> 3/4x1/2 1x1/2 1x3/4	<b>TS Valve Socket</b>  <b>Ukuran</b> 1/2 3/4 1 1 1/4 1 1/2 1 1/4	<b>TS Faucet Socket</b>  <b>Ukuran</b> 1/2 3/4 1 1 1/4	<b>TS Faucet Elbow</b>  <b>Ukuran</b> 1/2
<b>TS Faucet Tee</b>  <b>Ukuran</b> 1/2	<b>TS R-Valve Socket</b>  <b>Ukuran</b> 3/4x1/2 1x1/2 1x3/4	<b>TS Cap</b>  <b>Ukuran</b> 1/2 3/4 1	<b>Union Socket</b>  <b>Ukuran</b> 3/4	<b>Water Moor</b>  <b>Ukuran</b> 1/2 3/4 1 1x3/4	<b>NEW Elbow</b>  <b>Ukuran</b> 1 1/2 2 2 1/2 3	<b>NEW Spear Valve Socket</b>  

### CLASS DV


<b>DV-D Inceaser</b>  <b>Ukuran</b> 3x2 4x3	<b>DV-D Cap/Dop</b>  <b>Ukuran</b> 2 2 1/2 3 4	<b>DV-D Knee</b>  <b>Ukuran</b> 1 1/2 2 2 1/2 3 4 5 6	<b>DV-D Tee</b>  <b>Ukuran</b> 1 1/2 2 2 1/2 3 4 5	<b>DV-D Elbow 45°</b>  <b>Ukuran</b> 3 4	<b>DV-D Tee Y 90°</b>  <b>Ukuran</b> 3 4	<b>Tee Y 45°</b>  <b>Ukuran</b> 3 4
--	---	---	--	--	---	--

### BALL VALVE



Ukuran (inch)
1/2
3/4
1
1 1/4
1 1/2
2

### BALL VALVE GA



Ukuran (inch)
1/2
3/4
1
1 1/4
1 1/2
2

### PIPA CONDUIT



Ukuran (mm)
16
20
25

\*Panjang 2,9m/batang



Standar Nasional Indonesia (SNI)

Japan Industrial Standard K-6742

ISO 9001:2015

**PIPA ABU uPVC**

**(JIS) K-6742**

**PIPA PUTIH uPVC**

CLASS	Diameter Nominal	Outside Diameter	Wall Thickness
AW	1/2"	22 mm	2.40 mm
	3/4"	26 mm	2.50 mm
	1"	32 mm	2.60 mm
	1 1/4"	42 mm	2.70 mm
	1 1/2"	48 mm	3.10 mm
	2"	60 mm	3.50 mm
	2 1/2"	76 mm	3.60 mm
	3"	89 mm	4.50 mm
	4"	114 mm	5.20 mm
	5"	140 mm	5.70 mm
	6"	165 mm	7.50 mm
	8"	216 mm	9.00 mm
	10"	267 mm	9.60 mm
	12"	318 mm	12.0 mm
D	1 1/4"	42 mm	1.30 mm
	1 1/2"	48 mm	1.60 mm
	2"	60 mm	1.70 mm
	2 1/2"	76 mm	2.00 mm
	3"	89 mm	2.50 mm
	4"	114 mm	2.70 mm
	5"	140 mm	3.60 mm
	6"	165 mm	3.70 mm
	8"	216 mm	5.00 mm
	10"	267 mm	7.00 mm
12"	318 mm	8.00 mm	
C	5/8"	17 mm	0.80 mm
	1/2"	22 mm	1.10 mm
	3/4"	26 mm	1.40 mm
	1"	32 mm	1.40 mm
	2"	60 mm	1.40 mm
	2 1/2"	76 mm	1.40 mm
	3"	89 mm	1.40 mm
	4"	114 mm	1.40 mm

CLASS	Diameter Nominal	Outside Diameter	Wall Thickness
AW	1/2"	22 mm	1.60 mm
	3/4"	26 mm	1.90 mm
	1"	32 mm	2.00 mm
	1 1/4"	42 mm	2.20 mm
	1 1/2"	48 mm	2.30 mm
	2"	60 mm	2.40 mm
	2 1/2"	76 mm	2.60 mm
	3"	89 mm	3.15 mm
	4"	114 mm	4.10 mm
	5"	140 mm	5.50 mm
	6"	165 mm	6.50 mm
	8"	216 mm	7.70 mm
	10"	267 mm	9.60 mm
	12"	318 mm	12.0 mm
D	1 1/4"	42 mm	1.30 mm
	1 1/2"	48 mm	1.40 mm
	2"	60 mm	1.50 mm
	2 1/2"	76 mm	1.60 mm
	3"	89 mm	1.70 mm
	4"	114 mm	2.20 mm
	5"	140 mm	2.70 mm
	6"	165 mm	3.20 mm
	8"	216 mm	4.20 mm
	10"	267 mm	5.40 mm
12"	318 mm	6.50 mm	
C	5/8"	17 mm	0.80 mm
	1/2"	22 mm	1.10 mm
	3/4"	26 mm	1.40 mm
	1"	32 mm	1.40 mm
	2"	60 mm	1.40 mm
	2 1/2"	76 mm	1.40 mm
	3"	89 mm	1.40 mm
	4"	114 mm	1.40 mm

Toleransi ketebalan dinding pipa ± 10%

**PIPA HDPE**  
 (High Density Polyethylene)





Pipe OD (mm)	Ukuran (inch)	Water
		S - 8 (SDR 17) PN 10
20	1/2	1.8
25	3/4	2.0
32	1	2.2
40	1 1/4	2.4
50	1 1/2	3.0
63	2	3.8



# PIPA SOLVENT CEMENT JOINT (SCJ)



# PIPA RUBBER RING JOINT (RRI)

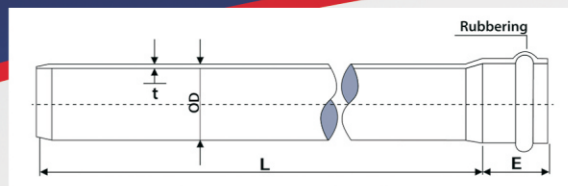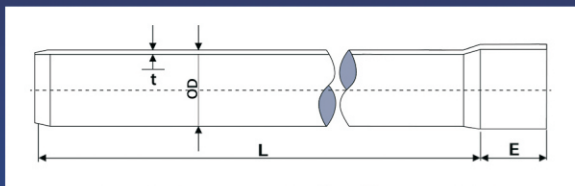

Normal Outside Diameter (mm)	Normal Diameter (inch)	Nominal Wall Thickness (mm)			
		S-8 (6m)	S-10 (6m)	S-12.5 (6m)	S-16 (6m)
25	3/4	1.5	-	-	-
32	1	1.9	1.6	-	-
40	1 1/4	2.4	1.9	1.6	-
50	1 1/2	3.0	2.4	2.0	1.6
63	2	3.8	3.0	2.4	2.0
75	2 1/2	4.5	3.6	2.9	2.3
90	3	5.4	4.3	3.5	2.8
110	4	6.6	5.3	4.2	2.4
160	6	9.5	7.7	6.2	4.9
200	8	11.9	9.6	7.7	6.2
250	10	14.8	11.9	9.6	7.7
315	12	18.7	15.0	12.1	9.7

## TALANG AIR 140



## TALANG AIR R 6

